



Pipe Continuous Wall

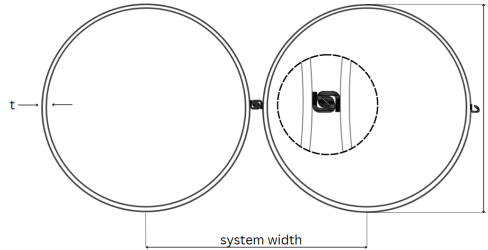

Pipe - Pipe Combination System	PROPERTIES OF PIPE PILE			PROPERTIES OF COMBINED WALL					COATING
	Outside Diameter	Wall Thickness	Pipe Weight	System Width	System Inertia	Section Modulus	Weight	Cross Sectional Area	Both Sides of Wall
	in (mm)	in (mm)	lb/ft (kg/m)	in (mm)	in ⁴ /ft (cm ⁴ /m)	in ³ /ft (cm ³ /m)	lb/ft ² (kg/m ²)	in ² /ft (cm ² /m)	ft ² /ft (m ² /m)
24 x 0.375	24	0.375	94.71	31.10	749	62.5	44.4	13.08	7.47
609.6	609.6	9.50	140.9	789.94	102,342	3,357.7	216.8	276.9	2.3
24 x 0.500	24	0.500	125.61	31.10	984	82.0	56.3	16.59	7.47
609.6	609.6	12.70	186.9	789.94	134,329	4,407.1	275.1	351.1	2.3
24 x 0.625	24	0.625	156.17	31.10	1,210	100.9	68.1	20.05	7.47
609.6	609.6	15.90	232.4	789.94	165,289	5,422.9	332.6	424.5	2.3
30 x 0.375	30	0.375	118.76	37.10	1,239	82.6	45.0	13.25	9.04
762.00	762.0	9.50	176.7	942.34	169,146	4,439.5	219.8	280.5	2.8
30 x 0.500	30	0.500	157.68	37.10	1,631	108.7	57.6	16.95	9.04
762.00	762.0	12.70	234.7	942.34	22,713	5,845.5	281.2	358.8	2.8
30 x 0.625	30	0.625	196.26	37.10	2,013	134.2	70.1	20.62	9.04
762.00	762.0	15.90	292.1	942.34	274,913	7,215.6	342.2	436.5	2.8
36 x 0.500	36	0.500	189.75	43.10	2,446	135.9	58.5	17.22	10.61
914.4	914.4	12.70	282.4	1094.74	334,059	7,306.6	285.7	364.4	3.2
36 x 0.625	36	0.625	236.35	43.10	3,026	168.1	71.5	21.03	10.61
914.4	914.4	15.90	351.7	1094.74	413,225	9,038.2	349.0	445.1	3.2
36 x 0.750	36	0.750	282.62	43.10	3,593	199.6	84.4	24.82	10.61
914.4	914.4	19.10	420.6	1094.74	490,701	10,732.8	411.9	525.3	3.2
42 x 0.500	42	0.500	221.82	49.10	3,430	163.3	59.2	17.42	12.18
1067.0	1066.8	12.70	330.1	1247.14	468,441	8,782.2	289.0	368.7	3.7
42 x 0.625	42	0.625	276.44	49.10	4,250	202.4	72.5	21.34	12.18
1067.0	1066.8	15.90	411.4	1247.14	580,324	10,879.7	354.2	451.7	3.7
42 x 0.750	42	0.750	330.72	49.10	5,054	240.7	85.8	25.24	12.18
1067.0	1066.8	19.10	492.2	1247.14	690,167	12,939.0	419.0	534.4	3.7
48 x 0.500	48	0.500	253.89	55.10	4,583	191.0	59.7	17.57	13.75
1219.0	1219.2	12.70	377.8	1399.54	625,902	10,267.4	291.7	372.0	4.2
48 x 0.625	48	0.625	316.52	55.10	5,685	236.9	73.4	21.58	13.75
1219.0	1219.2	15.90	471.0	1399.54	776,266	12,734.0	358.3	456.8	4.2
48 x 0.750	48	0.750	378.83	55.10	6,768	282.0	86.9	25.57	13.75
1219.0	1219.2	19.10	563.8	1399.54	924,237	15,161.4	424.5	541.2	4.2

Pipe Continuous Wall

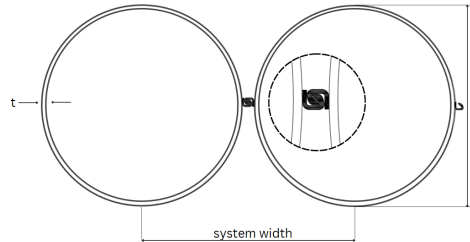

Pipe - Pipe Combination System	PROPERTIES OF PIPE PILE			PROPERTIES OF COMBINED WALL					COATING
	Outside Diameter	Wall Thickness	Pipe Weight	System Width	System Inertia	Section Modulus	Weight	Cross Sectional Area	Both Sides of Wall
	in (mm)	in (mm)	lb/ft (kg/m)	in (mm)	in ⁴ /ft (cm ⁴ /m)	in ³ /ft (cm ³ /m)	lb/ft ² (kg/m ²)	in ² /ft (cm ² /m)	ft ² /ft (m ² /m)
54 x 0.625	54	0.625	356.61	61.10	7,331	271.5	74.0	21.78	15.32
1372.6	1371.6	15.90	530.7	1551.94	1,001,085	14,597.4	361.5	460.9	4.7
54 x 0.750	54	0.750	426.93	61.10	8,736	323.6	87.9	25.84	15.32
1372.6	1371.6	19.10	635.3	1551.94	1,192,954	17,395.1	429.0	546.8	4.7
54 x 0.875	54	0.750	496.92	61.10	10,121	374.9	101.6	29.87	15.32
1372.6	1371.6	22.20	739.5	1551.94	1,382,103	20,153.2	496.1	632.3	4.7
60 x 0.625	60	0.625	396.70	67.10	9,189	306.3	74.6	21.94	16.89
1524.0	1524.0	15.90	590.4	1704.34	1,254,802	16,467.2	364.2	464.3	5.1
60 x 0.750	60	0.750	475.04	67.10	10,958	365.3	88.6	26.05	16.89
1524.0	1524.0	19.10	706.9	1704.34	1,496,346	19,637.1	432.6	551.5	5.1
60 x 0.875	60	0.875	553.04	67.10	12,704	423.5	102.6	30.15	16.89
1524.0	1524.0	22.20	823.0	1704.34	1,734,814	22,766.6	500.7	638.2	5.1
66 x 0.750	66	0.750	523.14	73.10	13,433	407.1	89.2	26.24	18.46
1676.4	1676.4	19.10	778.5	1856.74	1,834,432	21,885.4	435.6	555.3	5.6
66 x 0.875	66	0.875	609.16	73.10	15,583	472.2	103.3	30.39	18.46
1676.4	1676.4	22.20	906.5	1856.74	2,127,997	25,387.7	504.6	643.2	5.6
66 x 1.000	66	1.000	694.85	73.10	17,708	536.6	117.4	34.52	18.46
1676.4	1676.4	25.40	1,034.1	1856.74	2,418,156	28,849.4	573.3	730.7	5.6
72 x 0.750	72	0.750	571.25	79.10	16,163	449.0	89.8	26.39	20.03
1828.8	1828.8	19.10	850.1	2009.14	2,207,223	24,138.5	438.2	558.6	6.1
72 x 0.875	72	0.875	665.29	79.10	18,759	521.1	104.0	30.58	20.03
1828.8	1828.8	22.20	990.1	2009.14	2,561,668	28,014.8	507.9	647.3	6.1
72 x 1.000	72	1.000	758.99	79.10	21,327	592.4	118.2	34.76	20.03
1828.8	1828.8	25.40	1,129.5	2009.14	2,912,349	31,849.9	577.3	735.8	6.1
78 x 0.875	78	0.875	721.41	85.10	22,231	570.0	104.6	30.75	21.60
1981.2	1981.2	22.20	1,073.6	2161.54	3,035,839	30,646.5	510.7	350.9	6.6
78 x 1.000	78	1.000	823.13	85.10	25,285	648.3	118.9	34.97	21.60
1981.2	1981.2	25.40	1,225.0	2161.54	3,452,826	34,856.0	580.8	740.1	6.6
84 x 0.875	84	0.875	777.53	91.10	26,000	619.0	105.1	30.90	23.17
2133.6	2133.6	22.20	1,157.1	2313.94	3,550,517	33,282.0	513.2	654.0	7.1
84 x 1.000	84	1.00	887.27	91.10	29,581	704.3	119.6	35.15	23.17
2133.6	2133.6	25.40	1,320.4	2313.94	4,039,594	37,866.5	583.8	744.0	7.1